
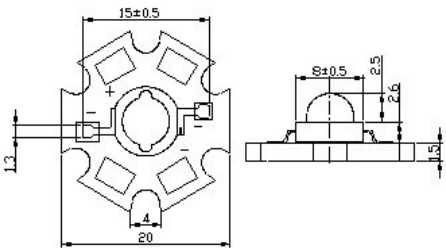






VOLLONG SMD AC LED SPECIFICATION

Pictures reference			Package Dimensions(mm)						
									
Model	Emitting Color	Forward Current(mA)	Power Dissipation (w)	Wavelength (nm)TC(K)	Operation Voltage(V)	Luminous Flux(lm)		Viewing Angle	
						Min	Max		
1W AC LED	Warm White Natural White Cool White	350mA	1W	2670K-3800K 3800K-5650K 5650K-7000K	110V/220V	40	50	110	
Pictures reference			Package Dimensions(mm)						
									
Part Number	Emitting Color	RMS Current(mA)	Power Dissipation (w)	Wavelength (nm)TC(K)	Operation Voltage(V)	Luminous Flux(lm)		Viewing Angle	
						Min	Max		
4W AC LED Small PCB	Warm White Natural White Cool White	40/20mA	4W	2670K-3800K 3800K-5650K 5650K-7000K	110V/220V	140	200	110	
5W AC LED Small PCB	Warm White Natural White Cool White	50/25mA	5W	2670K-3800K 3800K-5650K 5650K-7000K	110V/220V	170	220	110	
Pictures reference			Package Dimensions(mm)						
									
Part Number	Emitting Color	RMS Current(mA)	Power Dissipation (w)	Wavelength (nm)TC(K)	Operation Voltage(V)	Luminous Flux(lm)		Viewing Angle	
						Min	Max		
4W AC LED Standard PCB	Warm White Natural White Cool White	40/20mA	4W	2670K-3800K 3800K-5650K 5650K-7000K	110V/220V	140	200	110	
5W AC LED Standard PCB	Warm White Natural White Cool White	50/25mA	5W	2670K-3800K 3800K-5650K 5650K-7000K	110V/220V	170	220	110	